



# Gorgon Project

Carbon Dioxide Injection System Pipeline and  
Wells Operations Environment Management Plan:  
Summary

**Document ID:** ABU161100705  
**Revision Date:** 14 February 2018  
**Information Sensitivity:** Public

**Revision ID:** 1.4  
**Next Revision Due:** TBC

## Contents

1.0	Introduction .....	5
1.1	Overview .....	5
1.2	Location .....	5
1.3	Scope .....	7
1.4	Licence Holder and Operator Details .....	7
1.5	Stakeholder Engagement .....	7
1.5.1	Stakeholder Identification .....	7
1.5.2	Stakeholder Log.....	8
1.5.3	Ongoing Consultation .....	9
2.0	Description of the Activity .....	10
2.1	Carbon Dioxide Injection System Overview .....	10
2.1.1	Timing .....	10
2.1.2	CO <sub>2</sub> Pipeline .....	10
2.1.3	CO <sub>2</sub> Injection Drill Centres .....	10
2.1.4	Surveillance Wells.....	11
2.1.5	Pressure Management Drill Centres.....	11
2.1.6	Utility Power and Fibre-optic Cables .....	11
2.1.7	Cathodic Protection .....	11
2.2	Commissioning and Start-up.....	11
2.2.1	CO <sub>2</sub> Pipeline and Injection Drill Centres .....	11
2.2.2	Pressure Management Drill Centres.....	12
2.3	Operations.....	12
2.4	Inspections, Maintenance, and Repair .....	13
2.4.1	Inspections .....	13
2.4.2	Maintenance and Repairs .....	13
2.5	Vehicles and Equipment .....	13
3.0	Description of the Environment.....	15
3.1	Barrow Island Conservation Status .....	15
3.2	Physical Environment of Barrow Island.....	15
3.2.1	Climate.....	15
3.2.2	Geology, Landform and Soils .....	15
3.2.3	Hydrogeology .....	15
3.2.4	Surface water .....	17
3.3	Operational Area .....	18
3.3.1	Terrestrial Flora and Vegetation.....	18
3.3.2	Ecological Communities .....	18
3.3.3	Significant Fauna Habitats.....	18
3.3.4	Terrestrial Fauna .....	18
3.3.5	Cultural Heritage .....	19
3.3.6	Petroleum Activities and Infrastructure.....	19
3.4	Land Adjacent to the Operational Area .....	19
3.4.1	Terrestrial Flora and Vegetation.....	19
3.4.2	Ecological Communities .....	20
3.4.3	Significant Fauna Habitats.....	20
3.4.4	Terrestrial Fauna .....	20
3.4.5	Cultural Heritage .....	21
3.4.6	Petroleum Activities and Infrastructure.....	21
4.0	Environmental Risk Assessment Methodology.....	22
5.0	Management Approach .....	27

5.1	Operational Excellence Management System.....	27
5.2	Environment Plan Review .....	27
6.0	Acronyms and Abbreviations .....	28
7.0	References.....	29

## Tables

Table 1-1: Titleholder Details .....	7
Table 1-2: Operator Contact Details.....	7
Table 1-3: Consultation Summary .....	8
Table 4-1: Summary of the Potential Impacts Risks and Control Measures.....	23
Table 5-1: OEMS Elements Relevant to the Activity.....	27
Table 6-1: Acronyms and Abbreviations .....	28

## Figures

Figure 1-1: CO <sub>2</sub> Pipeline and Wells Operational Area .....	6
Figure 3-1: Hydrogeological Formations on Barrow Island .....	17

## 1.0 Introduction

### 1.1 Overview


Chevron Australia Pty Ltd (CAPL) is the operator for the Gorgon Gas Development (also known as the Gorgon Project) on behalf of the Gorgon Joint Venture (GJV). Offshore production wells and pipeline infrastructure associated with the Jansz–Io and Gorgon gas fields gathers and transports gas to the Gorgon Gas Treatment Plant (GGTP) on Barrow Island, where it is processed.

Carbon dioxide (CO<sub>2</sub>), which occurs naturally in the feed gas, is separated during the production process and injected in a supercritical state into deep rock formations below Barrow Island. The operation of CO<sub>2</sub> infrastructure has been evaluated as having low environmental impact or risks.

### 1.2 Location

The CO<sub>2</sub> Pipeline and Wells are located on Barrow Island within the PL93 Licence Area (Figure 1-1). The CO<sub>2</sub> Pipeline runs north from the GGTP on the eastern side of Barrow Island for approximately 7.3 km along the pipeline right-of-way (ROW), connecting to CO<sub>2</sub> Injection Drill Centres (DC-A, DC-B, and DC-C). Pressure Management Drill Centres (DC-D and DC-E) are located more than 4 km west of the CO<sub>2</sub> Pipeline and the Injection Drill Centres.

Detailed information regarding the location and layout of the infrastructure associated with this Plan is included in Section 2.1.

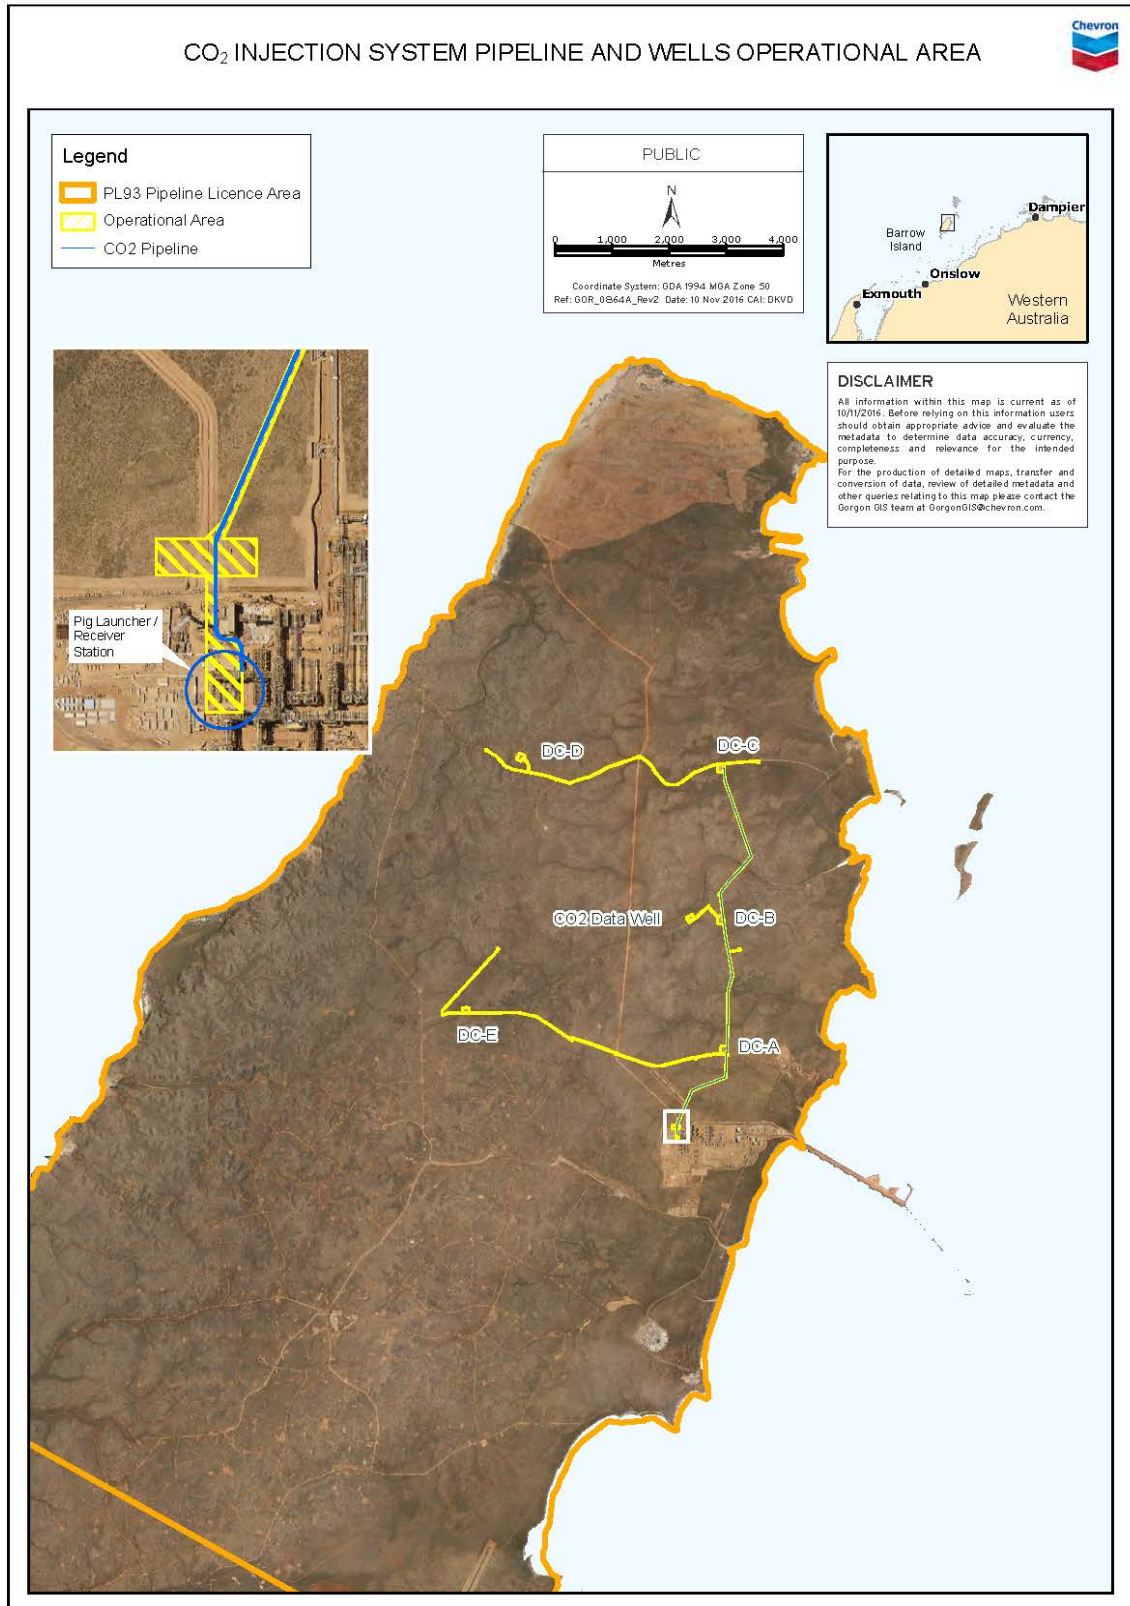

### 1.3 Scope

The PL93 Licence Area (Figure 1-1) encompasses much of Barrow Island, identified at the licence application stage to allow for the potential development and expansion of the CO<sub>2</sub> Injection System. The scope of the Environment Management Plan (EMP) is limited to the activity as summarised in Section 2.0.

### 1.4 Licence Holder and Operator Details

Chevron Australia Pty Ltd is nominated as the operator on behalf of the GJV title holders (Table 1-1) for Pipeline Licence PL93, granted under the *Petroleum Pipelines Act 1969* (WA).

**Table 1-1: Titleholder Details**

Titles	Details	Titleholders	Operator	Address
PL93	CO <sub>2</sub> Injection System Pipeline Licence Onshore	<ul style="list-style-type: none"> <li>• Chevron (TAPL) Pty Ltd</li> <li>• Shell Australia Pty Ltd</li> <li>• Mobil Australia Resources Company Pty Ltd</li> <li>• Tokyo Gas Gorgon Pty Ltd</li> <li>• Osaka Gas Gorgon Pty Ltd</li> <li>• JERA Gorgon Pty Ltd</li> </ul>	Chevron Australia Pty Ltd	QV1, 250 St Georges Terrace, Perth, WA, 6000

In accordance with the Petroleum Pipelines (Environment) Regulations 2012, contact details for the operator, CAPL, are listed in Table 1-2.

**Table 1-2: Operator Contact Details**

<b>Company Name</b>	Chevron Australia Pty Ltd
<b>Nominated Liaison Person</b>	Kate Yates/Susanna Ling (public contact)
<b>Position</b>	Operations Manager/PGPA Operations Manager
<b>Business Address</b>	GPO Box S1580, Perth WA 6845
<b>Telephone Number</b>	08 9413 6764/08 9216 4000 (public contact number)
<b>Fax Number</b>	08 9413 6067
<b>Email Address</b>	<a href="mailto:ABUEnvPlanInfo@chevron.com">ABUEnvPlanInfo@chevron.com</a>

### 1.5 Stakeholder Engagement

Regular consultation with relevant stakeholders has been undertaken by CAPL throughout the development of the environmental impact assessment management documentation for the Gorgon Gas Development and Jansz Feed Gas Project.

Stakeholder consultation has included engagement with the community, government departments, industry operators and contractors to CAPL via planning workshops, risk assessments, meetings, teleconferences, and the formal environmental approval processes.

#### 1.5.1 Stakeholder Identification

In accordance with Regulation 17 of the Petroleum Pipelines (Environment) Regulations 2012, CAPL completed a scoping exercise to determine which authorities, persons, and organisations were considered to be relevant.

No permanent population resides on Barrow Island. Barrow Island has been actively used for petroleum exploration and production purposes since 1957 and access to

Barrow Island is restricted to personnel associated with oilfield operations, Western Australian Department of Parks and Wildlife (Parks and Wildlife) staff, and Gorgon Gas Development and Jansz Feed Gas Pipeline staff. Therefore, the relevant stakeholders associated with the operation of the CO<sub>2</sub> Injection System Pipeline and Wells were identified as:

- Department of Biodiversity, Conservation and Attractions (DBCA) (formerly Parks and Wildlife) (State)
- Department of Water and Environmental Regulation (DWER) (formerly Office of the Environmental Protection Agency) (State)
- Department of Jobs, Tourism, Science and Innovation (DJTSI) (formerly State Development) (State)
- Department of the Environment and Energy (Commonwealth).

### 1.5.2 Stakeholder Log

Table 1-3 summarises the consultation undertaken specific to this Plan.

**Table 1-3: Consultation Summary**

Stakeholder	Date	Summary of Consultation	Objections / Claims Raised	CAPL Response
BDCA	27 October 2016	Provision of project-specific information	Requested a copy of the EMP	Provided a copy of the EMP
	22 November 2016	Provision of Rev 0.3 of EMP.	CAPL received a response noting that DBCA had no further questions or concerns in relation to the EMP (Appendix B for consultation records).	N/a
DWER	26 October 2016	Provision of project-specific information	CAPL received no written response from DWER.	N/a
Department of the Environment and Energy	26 October 2016	Provision of project-specific information	CAPL received a response noting that the DotEE had no comments and didn't require any additional information.  No objections or claims were received (Appendix B for consultation records)	N/a

DJTSI	10 November 2016	Provision of project-specific information	DJTSI acknowledged receipt of information, and provided no objections or claims to the information provided (Appendix B for consultation records)	N/a
-------	------------------	---	---	-----

### 1.5.3 Ongoing Consultation

CAPL will continue to provide updates regarding Gorgon Operations (as required) at regular informal meetings with these stakeholders.

DotEE and DWER continue to receive annual updates on Gorgon status and environmental performance, including CO<sub>2</sub> related activities, via existing regulatory defined avenues such as annual performance reporting, annual compliance reporting and incident notifications.

For other interested stakeholders, these annual reports are publicly available on the CAPL website (<https://www.chevronaustralia.com/our-businesses/gorgon/environmental-approvals>).

A Memorandum of Understanding has been established between DBCA and CAPL formalising communication arrangements, ensuring DBCA are kept informed of Gorgon related activities.

## 2.0 Description of the Activity

The activities associated with the operation of the CO<sub>2</sub> Pipeline and Wells include:

- Commissioning and Start-up (Section 2.2)
- Operations (Section 2.3)
- Inspections, Maintenance, and Repair (IMR) (Section 2.4).

Section 2.1 summarises the CO<sub>2</sub> Injection System and includes general details on the location and layout of the infrastructure associated with the CO<sub>2</sub> Pipeline and Wells.

### 2.1 Carbon Dioxide Injection System Overview

The CO<sub>2</sub> Injection System is designed to dispose, by underground injection, the volume of reservoir carbon dioxide that is removed during routine gas processing operations at the GGTP that would otherwise be vented to the atmosphere.

The separation of reservoir CO<sub>2</sub> from feed gas occurs at the GGTP. The reservoir CO<sub>2</sub> is then transported via an underground pipeline to a series of three drill centres (DC-A, DC-B, and DC-C), each comprising several injection wells, located approximately 1.2 km, 3.6 km, and 6.3 km north of the GGTP. At these drill centres, reservoir CO<sub>2</sub> is injected into the Dupuy Formation, which is situated more than 2000 m beneath Barrow Island and which is overlain by several sealing formations including the lowermost Barrow Group.

Two reservoir surveillance wells, located at DC-A and DC-C, monitor the movement of reservoir CO<sub>2</sub> within the Dupuy Formation. Another surveillance well (CO<sub>2</sub> data well) near DC-B monitors the pressure in the overlying Barrow Group and passive microseismic measurements. Pressure within the Dupuy Formation is managed via four pressure management wells located at DC-D and DC-E more than 4 km west of the pipeline and injection wells. To partially offset increasing reservoir pressure from CO<sub>2</sub> injection, formation water is extracted via the four pressure management wells, which is then injected into the overlying Barrow Group. The pipeline and wells are protected from corrosion via an impressed current cathodic protection system and protected from internal corrosion by dew point management of CO<sub>2</sub> entering the pipeline system. The system also comprises support infrastructure (e.g. utility power supply; communication infrastructure).

#### 2.1.1 Timing

Initial commissioning and start-up activities are scheduled to be undertaken until Q2 and Q3 2018. Following start-up, operations are expected to continue for the nominal operational design life (minimum 50 years).

#### 2.1.2 CO<sub>2</sub> Pipeline

A 300 mm nominal diameter carbon steel pipeline runs approximately 7.3 km from the pig launcher in the GGTP to a pig receiver at the northernmost Injection Drill Centre (DC-C). The pipeline transports reservoir CO<sub>2</sub> from the GGTP to the three Injection Drill Centres. Three offtake 'barred-tees' deliver the reservoir CO<sub>2</sub> to the Injection Drill Centres; at each CO<sub>2</sub> Injection Drill Centre, a short riser from the offtake barred tee is above surface and connected to two manually operated isolation valves. These valves allow for the drill centre manifold and well heads to be isolated from the pipeline.

#### 2.1.3 CO<sub>2</sub> Injection Drill Centres

Three CO<sub>2</sub> Injection Drill Centres (DC-A, DC-B and DC-C) receive reservoir CO<sub>2</sub> from the pipeline offtakes. Each drill centre comprises a central manifold connected by flowlines to 'Christmas tree' structures on multiple injection wells. Wellhead and manifold

facilities are surrounded by protective bollards. The locations of the injection drill centres and wells are shown in Figure 1-1.

#### **2.1.4 Surveillance Wells**

Two Reservoir Surveillance Wells (A-RS1 and C-RS2, located within DC-A and DC-C respectively) monitor the CO<sub>2</sub> saturation and movement in the injection interval. The Gorgon CO<sub>2</sub> Data Well has been converted to measure pressure in the overlying Barrow Group and also detect microseismic events. The locations of the drill centres are shown in Figure 1-1.

#### **2.1.5 Pressure Management Drill Centres**

The Pressure Management Drill Centres (DC-D and DC-E) are more than 4 km west of the nearest Injection Drill Centre (Figure 1-1) and are linked to the injection system via power and fibre-optic communications cables. Each Pressure Management Drill Centre has two water production wells connected by spools to water injection wells that are each capable of pumping up to 3,180 m<sup>3</sup> of formation water, per day. Water production and injection facilities are surrounded by protective bollards.

#### **2.1.6 Utility Power and Fibre-optic Cables**

Utility power and fibre-optic communications cables installed along the pipeline ROW enable the monitoring and control of the CO<sub>2</sub> Pipeline and Wells. Cables are located above ground in a utility corridor between the GGTP and a point where the ROW crosses the GGTP ground flare pipeline. From the flare crossing point, the utility power and fibre-optic cables are installed in a common trench with the CO<sub>2</sub> Pipeline at a minimum depth of approximately 750 mm, and then branch off from the main trench to the CO<sub>2</sub> Injection Drill Centres. Cables extend from DC-A to DC-E, and from DC-C to DC-D in a utility corridor that follows the existing road infrastructure (Figure 1-1). In addition, cabling extends from DC-B to the CO<sub>2</sub> Data Well following the existing road infrastructure. Substations are located at the drill centres, with fenced transformers at DC-D and DC-E.

#### **2.1.7 Cathodic Protection**

The CO<sub>2</sub> Pipeline and Wells are protected from external corrosion by an impressed current cathodic protection system, comprising up to 12 sacrificial anode ground beds with power provided from the GGTP via the utility power cables (Figure 1-1). Above-ground cathodic protection test posts are installed along the ROW and at the drill centres to allow for inspection (Section 2.4.1).

### **2.2 Commissioning and Start-up**

Commissioning and start-up activities will be supported on site by a small team of field personnel who undertake observations at the drill centres or IMR activities. Information regarding IMR activities and associated vehicle operations is provided in Section 2.5.

#### **2.2.1 CO<sub>2</sub> Pipeline and Injection Drill Centres**

Commissioning and start-up of the CO<sub>2</sub> Pipeline and Injection Wells involves introducing reservoir CO<sub>2</sub> to the system by opening the isolation valve within the GGTP. Prior to the introduction of supercritical CO<sub>2</sub> into the pipeline, the following activities are undertaken:

- removal of pipeline valves to upgrade the valves to protect against corrosion.
- mechanical cleaning of the pipeline using brush and foam pigs; and rotti jetting or equivalent on the pipeline lateral lines, which cannot be pigged.

- chemical cleaning of the pipeline using ~5% citric acid and/or demineralised water/mono-ethylene glycol (MEG); discharged to temporary tanks on the drill centres and removed from the Operational Area.
- nitrogen inertion of the pipeline
- reinstatement of the valves
- leak testing of pipeline using high-pressure membrane nitrogen
- vacuum-drying of pipeline and drill centres using cryogenic nitrogen, which is vented.
- an intelligent pig run may be completed to baseline the pipeline prior to the introduction of CO<sub>2</sub> from the GTP.

Start-up is initiated by introducing cryogenic CO<sub>2</sub> into the pipeline to pressurise and warm up the system, which requires venting at the pig launcher and drill centres.

Once the required operating temperature has been reached at the drill centres, injection will commence into the reservoir.

Filters located upstream of the wells may be used to protect the injectivity of the formation by filtering out any remaining particulate matter if required.

### 2.2.2 Pressure Management Drill Centres

Commissioning and start-up at the pressure management wells is controlled from the Central Control Room (CCR) by opening valves to allow the production and reinjection of water. Prior to injection commencing, the following activities are undertaken:

- reinstatement of hook-up spools, power and controls to the wellhead
- leak testing of piping using high pressure nitrogen
- function testing of valves and instrumentation
- commissioning of the chemical injection spread (using water) and introduction of chemical treatment
- start-up of the submersible pumps in the source water wells

Injection into the water disposal wells while injecting treatment chemicals can then commence.

There is a potential opportunity to undertake a production test of the pressure management system prior to commencement of CO<sub>2</sub> injection. This test would provide valuable data in relation to the pressure response of the Dupuy Formation. The start-up activities would be consistent regardless of whether pressure management was started up before CO<sub>2</sub> injection.

## 2.3 Operations

The principal activity during operations is the steady-state flow of super-critical CO<sub>2</sub> through the pipelines. This flow is monitored and controlled from the Central Control Room (CCR) on Barrow Island.

The CO<sub>2</sub> is disposed of via subsurface injection into the Dupuy Formation. The CO<sub>2</sub> injection system is designed to inject 100% of the reservoir CO<sub>2</sub> recovered from the GTP gas stream processing. The peak design rate for CO<sub>2</sub> injection is 276 MMscf/d; the peak design annualised rate of CO<sub>2</sub> injection is 254 MMscf/d (Note: Actual flow rates may be lower than these design rates depending on Gorgon Field production performance, facility up-time and the CO<sub>2</sub> injection reservoir performance).

Pressure in the formation is monitored in the injection wells during operations, with pressure management achieved by extracting the brackish water from the Dupuy Formation via the water production wells and reinjecting it via the water injection wells

into the overlaying Barrow Group saline aquifer (Flacourt and Malouet Formations), which is geologically isolated from the surface environment.

To support the maintenance of the pressure management wells and interconnecting spools, scale inhibitor is added continuously in low concentrations to the water prior to reinjection. Other treatments that may be added to the water from time-to-time include small quantities of oxygen scavenger and biocide to prevent bacterial degradation of the injection formation.

## **2.4 Inspections, Maintenance, and Repair**

IMR of the CO<sub>2</sub> Injection System is undertaken to ensure integrity of the system is maintained at or above acceptable standards. IMR activities may occur at any time during commissioning, start-up, or operations.

### **2.4.1 Inspections**

Inspections are performed to check the integrity of the CO<sub>2</sub> Pipeline and Wells, and proactively identify maintenance or repair activities that may be required. Inspections may be routine, or may be triggered by specific events (such as cyclones or seismic events) that could affect the infrastructure. Potential inspection techniques include:

- visual inspections
- cathodic protection measurements
- pigging (in-line inspections)
- non-destructive testing.

### **2.4.2 Maintenance and Repairs**

Maintenance and repair activities may need to occur during the operational life of the Gorgon Project to:

- prevent deterioration and/or failure of infrastructure
- maintain reliability and performance of infrastructure.

Repairs to the facilities are not planned activities; therefore, it is difficult to confirm the exact characteristics of a repair in advance (e.g. location, extent, duration).

However, maintenance and repair activities are expected to be rare and infrequent, though the exact frequency of maintenance activities depends on the results of inspections. Such activities may comprise:

- maintenance of the ROW and licence areas
- maintenance of facilities and equipment
- maintenance of cathodic protection systems
- pigging (in-line maintenance/cleaning)
- repairs -may involve spot repairs or replacing sections of pipe, and may require excavation. Re-commissioning of the pipeline post-repair may include vacuum drying, nitrogen inertion, pressurisation, warm-up of the pipeline and drill centres (which requires venting), before reinjection can re-commence.

## **2.5 Vehicles and Equipment**

Onshore IMR activities are expected to be undertaken within the Operational Area. Activities are expected to take place during daylight hours; however, some maintenance (e.g. at the pig receiver station) or urgent repair activities in the Operational Area may also need to occur at night. ROW inspections are expected to be

undertaken approximately monthly and involve a small number of personnel and a single light vehicle driving along the ROW for a day.

Vehicles and equipment used for maintenance and repairs are expected to include:

- combination of light vehicles and trailer for personnel transport and support;
- flatbed trucks for transporting excavators, cranes, and other equipment; vacuum trucks; tipper trucks for backfill and/or spoil removal; and a range of hand tools.
- Portable lighting may be used, but only in the highly unlikely event that maintenance and repair activities must be undertaken at night.
- Temporary diesel generators.

## 3.0 Description of the Environment

The potential extent of the environmental aspects and impacts arising from planned activities during the commissioning, start-up, operation, and IMR of the CO<sub>2</sub> Pipeline and Wells is expected to be limited to the Operational Area (see Section 3.2.4).

However, the potential extent of the environmental aspects and impacts arising from unplanned events or from infrequent and non-routine activities may have a localised effect on the land environment immediately adjacent to the Operational Area, as described and risk assessed in Section 0.

The description of the environment is structured as follows:

- Barrow Island conservation status (Section 3.1)
- the physical environment of Barrow Island (Section 3.2)
- the environment associated with the Operational Area where planned activities occur (Section 3.2.4)
- the environment associated with land adjacent to the Operational Area that may be affected if an unplanned event occurs (Section 0).

### 3.1 Barrow Island Conservation Status

Barrow Island is reserved under the *Conservation and Land Management Act 1984* (WA) as a Class A Nature Reserve for the purpose of conservation of flora and fauna.

### 3.2 Physical Environment of Barrow Island

#### 3.2.1 Climate

Barrow Island is characterised by an arid subtropical climate with daytime temperatures ranging from 20 to 34 °C in summer, and from 17 to 26 °C in winter (Ref. 1). Average annual rainfall at Barrow Island is 318 mm with most rain (85%) occurring between January and July (Ref. 1). Rainfall is generally associated with tropical cyclones, which may occur between November and April. Between 1960 and 2003, an average 3.84 cyclones passed within 400 nm of Barrow Island each year (Ref. 2).

#### 3.2.2 Geology, Landform and Soils

The surface geology of Barrow Island generally comprises calcarenite and limestone overlain by alluvium, colluvium, and aeolian sand. Tertiary limestone ridges occur throughout the central upland plateaus of Barrow Island. The terrain ranges from steeper slopes in the west, to flatter, more gentle undulations as the ridges continue east (Ref. 1). Soil types are highly variable, ranging from 'silty clays' and 'clayey loam' textures in western parts of Barrow Island to coarser 'clayey sands', 'sandy loams' and 'sandy clays' dominating towards the east (Ref. 3).

#### 3.2.3 Hydrogeology

The surface hydrology on Barrow Island is characterised by run-off and short-term standing water after rainfall events, high rates of evaporation, and high infiltration capacities of the surface sands and limestone (Ref. 1). The Operational Area traverses several highly seasonal drainage lines, which generally align in a west-east orientation, but does not cross any permanent watercourses (Ref. 1). All watercourses are ephemeral and typically only flow for short periods following high-intensity rainfall, such as that associated with severe storms or cyclones (Ref. 1).

There is one shallow unconfined potentially fresh water aquifer on Barrow Island. This fresh water aquifer forms a lens of relatively fresh groundwater at depths typically between 9 m and 53 m, and floats upon denser, saline groundwater located

predominantly within the Tertiary Limestone (Ref. 2). Although beneficial uses of this fresh water aquifer are limited, it is an important environment for the stygofauna identified on Barrow Island.

Salinity of the water in this lens varies considerably across Barrow Island. Recharge to the aquifer is from rainfall and occurs most rapidly in areas of highly permeable soils overlying porous karst limestone. Lower salinities occur in areas of more rapid groundwater recharge. Higher salinities occur where recharge is slower, generally in areas where clays and silts are overlying the more porous and permeable limestone.

Salinity of the lens is also higher in coastal areas where seawater influx occurs close to the surface of the water-table.

Several saline ground water systems occur on Barrow Island:

- Tertiary Limestone extending from the mean sea level down to approximately 300 m below mean sea level
- Windalia Sand Member of the Muderong Shale, generally at depths between 650 m and 700 m below mean sea level
- the Barrow Group comprising the Flacourt and Malouet Formations and the Flag Sandstone, generally at depths between 1000 m and 2000 m below mean sea level
- the Dupuy Formation, generally at depths between 2000 m and 2300 m below mean sea level
- the Biggada Formation generally at depths greater than 3000 m below mean sea level.

The Dupuy Formation and Barrow Group systems are described in more detail below.

### **3.2.3.1 Barrow Group Formation**


The Barrow Group Formation is an underground saline aquifer situated at depths between 1200 m and 1900 m below the surface; it is divided into three separate formations—the Flacourt Formation, Malouet Formation, and Basal Barrow Group Shale (Figure 3-1). The Flacourt Formation is the proposed receiving interval for the produced Dupuy Formation water in the pressure management system. The Flacourt Formation is a saline aquifer situated at depths approximately 1200 m in true vertical depth. This Formation comprises sandstone-dominated sandstone/shale sets. Of the core data points taken for the Barrow Group Flacourt Formation, high formation quality was exhibited (Ref. 4).

The underlying Malouet Formation also comprises interbedded sands and shales, although the reservoir quality is not as high as the Flacourt. A pressure baffle within the Malouet Formation hydraulically separates the Lower Malouet Formation from the rest of the Barrow Group. This zone is monitored for pressure changes in the Gorgon CO<sub>2</sub> Data Well. At the base of the Barrow Group is the Basal Barrow Group Shale, which is the top seal (cap rock) for the underlying Dupuy Formation, and hence is the seal for the injected reservoir CO<sub>2</sub>.

The components of the upper Barrow Group (Flacourt and Upper Malouet Formations) behave as a single, hydraulically connected unit; however, the Barrow Group Formation is hydraulically separated from the shallow unconfined Tertiary Limestone by a thick sequence (more than 1000 m) of low permeability material (Ref. 4). Water quality is highly alkaline and saline (Total Dissolved Solids [TDS] approximately >30 000 mg/L), and contains hydrocarbons. It is generally characterised as containing stable minerals with a very low proportion of soluble metals.

A thick sequence of low permeability material (Muderong Shale and Gearle Siltstone) hydraulically separates the Barrow Group from the surface groundwater aquifer. The shallow unconfined aquifer forms a lens of fresher groundwater floating upon the denser, more saline sea water. Seasonal fluctuations in rainfall and tidal influence affect

this boundary between the fresh and saline water making it a transition zone, rather than a clear boundary (Ref. 5).

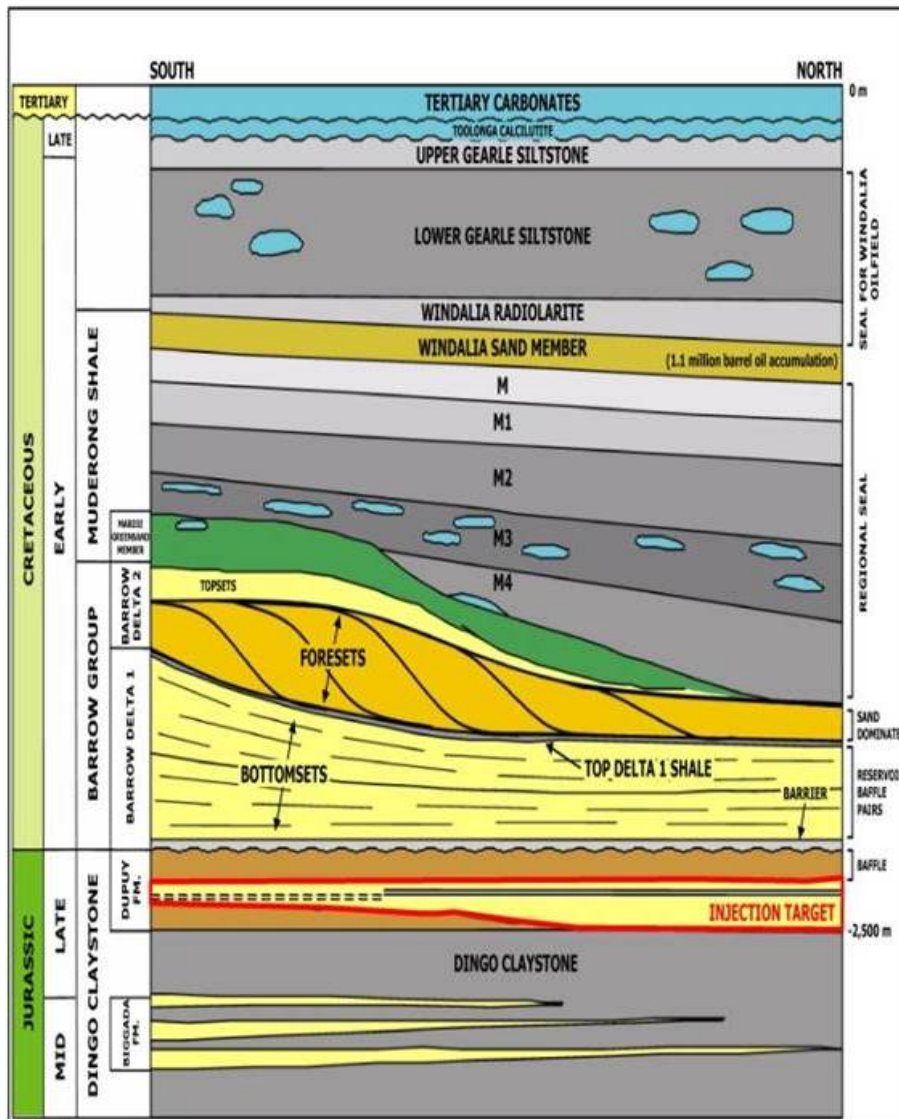

**Figure 3-1: Hydrogeological Formations on Barrow Island**

### 3.2.3.2 Dupuy Formation

Water produced from the Dupuy Formation is brackish (approximately 5000–6000 mg/L sodium chloride; 7000–8000 ppm TDS), and may occur at temperatures up to approximately 100 °C upon release (Ref. 6). Trace levels of naturally occurring dissolved hydrocarbons and metals have been identified in the formation water.

### 3.2.4 Surface water

All drainage lines on Barrow Island are ephemeral and typically only flow for short periods of time following high intensity rainfall such as that associated with storms or cyclones. Operational experience suggests these drainage lines are likely to be inundated between 3-7 days, depending on rainfall.

### 3.3 Operational Area

The Operational Area comprises land that was cleared and disturbed during construction and installation activities. Consequently, the particular values and sensitivities associated with the Operational Area are limited.

#### 3.3.1 Terrestrial Flora and Vegetation

No particular flora and vegetation values or sensitivities are located within the Operational Area. All flora and vegetation within the Operational Area were cleared during construction. Weed species, including Buffel Grass, have been recorded in various locations on Barrow Island and CAPL has established Weed Hygiene Zones (WHZs) for management purposes, including areas that transect the Operational Area.

#### 3.3.2 Ecological Communities

No Threatened Ecological Community, as listed in the Parks and Wildlife's Threatened Ecological Database (Ref. 7), has been recorded or is known to occur on Barrow Island.

Barrow Island is recognised as being of high conservation significance for subterranean fauna communities, with 19 troglofauna and 63 stygofauna species recorded to date. Ten subterranean fauna species recorded on Barrow Island are listed as specially protected fauna under the *Biodiversity Conservation Act 2016* (WA) and two species, the Blind Gudgeon fish *Milyeringa justitia* (*M. veritas*) and Blind Cave Eel *Ophisternon candidum*, are listed as Vulnerable under the Commonwealth *Environment Protection and Biodiversity Conservation Act 1999* (EPBC Act). Barrow Island subterranean fauna communities are listed by Parks and Wildlife as a Priority 1 Ecological Community ('not adequately defined').

Preliminary geological reviews suggest that strata on Barrow Island (e.g. interbedded sand/limestone) are relatively continuous (Ref. 8), and it is expected that if subterranean fauna occur beneath the Operational Area, it would be of no greater significance to that present elsewhere on Barrow Island. Subterranean fauna is known to exist up to approximately 50 m below ground level. Shallow surface formations and the watertable identified as subterranean fauna habitat are geologically isolated from the deeper formations.

#### 3.3.3 Significant Fauna Habitats

The Operational Area was cleared during construction and does not provide any habitats of particular value or sensitivity.

#### 3.3.4 Terrestrial Fauna

In the absence of fauna habitats of particular value or sensitivity, the Operational Area does not specifically support terrestrial fauna values, although mobile and transient fauna may be encountered in the Operational Area, including mammal, bird, and reptile species.

Four resident mammal species that may be encountered in the Operational Area are listed as specially protected fauna under the *Biodiversity Conservation Act 2016* (WA) or listed as Vulnerable under the EPBC Act. They are Barrow Island Euro *Macropus robustus isabellinus*, Spectacled Hare-wallaby *Lagorchestes conspicillatus conspicillatus*, Barrow Island Golden Bandicoot *Isoodon auratus barrowensis*, and Boodie *Bettongia lesueur*. All these species are widespread across Barrow Island.

Barrow Island supports numerous species of migratory shorebirds as well as resident shorebirds. Many of these species are protected under International treaties (e.g. JAMBA, CAMBA, ROKAMBA). Barrow Island is both a staging site and an important non-breeding site for migratory shorebirds. The highest abundance of shorebirds on Barrow

Island, with over two-thirds of records for most species, is associated with the south-eastern and southern coasts of the Island.

All avifauna with the potential to be encountered in the Operational Area occur widely across Barrow Island. The most common terrestrial avifauna species that have the potential to be encountered are the Spinifex-bird *Eremiornis carteri*, White-winged Fairy-wren (Barrow Island) *Malurus leucopterus edouardi*, Singing Honeyeater *Lichenostomus virescens*, White-breasted Wood Swallow *Artamus leucorhynchus*, and the Welcome Swallow *Hirundo neoxena* (Ref. 1). The White-winged Fairy-wren (Barrow Island) is the only terrestrial bird species on Barrow Island to be listed as Vulnerable under the *Biodiversity Conservation Act 2016* (WA) and the EPBC Act (Ref. 1), but the species is abundant in most habitats on Barrow Island (Ref. 1; Ref. 9) Other listed terrestrial avifauna species with the potential to be encountered in the Operational Area include four vagrant or migratory species protected under international agreements (Oriental Cuckoo *Cuculus saturatus*, Fork-tailed Swift *Apus pacificus*, White-throated Needletail *Hirandapus caudacutus*, and Yellow Wagtail *Motacilla flava*) and the Australian Bustard *Ardeotis australis*, which is listed by Parks and Wildlife as a Priority 4 species ('rare, near-threatened and other species in need of monitoring') (Ref. 1).

Reptile species also have the potential to be encountered in the Operational Area, although all species are abundant and widespread on Barrow Island, and none are listed as threatened under the *Biodiversity Conservation Act 2016* (WA) or the EPBC Act (Ref. 1).

### 3.3.5 Cultural Heritage

Cultural heritage surveys have not identified any cultural heritage sites or materials within the Operational Area.

### 3.3.6 Petroleum Activities and Infrastructure

Barrow Island has been actively used for petroleum exploration and production activities since 1957 and access is restricted to personnel associated with the oilfield operations, the Gorgon Gas Development, and Parks and Wildlife staff. Infrastructure associated with the Gorgon Gas Development Project, and the Barrow Island oil field road network traverse the Operational Area and adjacent land.

The Barrow Island oil field extracts crude oil, water and gas from the Windalia, Mardie B, M3, Gearle, Jurassic, Malouet and Tunney Formations on Barrow Island. Formation water for pressure management is extracted from Barrow Group Flacourt Formation, processed then injected into the Windalia Formation. Formation water is re-injected into the Windalia reservoir and also disposed of to the Barrow Group Flacourt Formation.

## 3.4 Land Adjacent to the Operational Area

In the unlikely event of an unplanned incident, there is the potential to expose the environment outside the defined Operational Area. As such, this area is described in the following subsections.

### 3.4.1 Terrestrial Flora and Vegetation

The flora and vegetation of Barrow Island, including the land adjacent to the Operational Area, is typical of the arid Pilbara region, and also has floral affinities with the Cape Range area on the mainland in the dominance of *Triodia* hummock grasses and sparse, low-lying *Melaleuca* shrubs (Ref. 10; Ref. 11). No Declared Rare Flora, pursuant to the *Wildlife Conservation Act 1950* (WA), or Threatened Flora species or plant communities listed under the EPBC Act have been recorded anywhere on Barrow Island.

Vegetation associations on land adjacent to the Operational Area are described as seasonal drainage line associations, associations located on flats, limestone hillslope associations, and disturbed limestone slope associations. These associations are generally characterised by varying combinations of *Triodia* grasses and shrub species such as *Melaleuca cardiophylla*, *Acacia* spp., *Hakea lorea*, *Gossypium robinsonii*, and *Petalostyllis labicheoides* (Ref. 1; Ref. 12). A hybrid population of *Acacia bivenosa* x *sclerosperma* subsp. *sclerosperma* was found in a drainage line approximately 40 m from the pipeline ROW near DC-B; this population has remained stable and in good condition throughout construction (Ref. 13; Ref. 14).

One Priority 3 ('poorly known') flora species (*Corchorus congener*) listed by Parks and Wildlife has previously been recorded near the Operational Area (Ref. 15; Ref. 16). Priority 3 flora is a non-legislative category aimed to manage plant taxa listed by Parks and Wildlife that are known from only a few collections or sites in WA, that have not been adequately surveyed, but are not considered under imminent threat. *Corchorus congener* is widespread across Barrow Island (Ref. 12) and the land adjacent to the Operational Area is not considered to be of any particular significance to this species.

### 3.4.2 Ecological Communities

Subterranean fauna communities, supporting species of troglofauna and stygofauna listed under the *Biodiversity Conservation Act 2016* (WA) and EPBC Act (as described in Section 3.3.2) may occur beneath the land adjacent to the Operational Area, but are not expected to be of any greater significance to that present elsewhere on Barrow Island.

On Barrow Island, *Triodia angusta* dominated 'Creepline Vegetation' communities are listed by Parks and Wildlife as a Priority 1 ('poorly known or not adequately defined') Ecological Community. However, the listing of Barrow Island 'Creepline Vegetation' as a Priority Ecological Community (PEC) reflects the level of disturbance as a result of past land use management practices, and the PEC does not include previously disturbed creeplines (Ref. 13). Although some seasonal drainage line vegetation associations adjacent to the Operational Area may comprise similar compositions of plant species to the Creepline Vegetation PEC, the drainage lines are classed as previously disturbed and therefore are not classified as PEC.

### 3.4.3 Significant Fauna Habitats

Habitats on Barrow Island considered important for their high biodiversity or for supporting protected or rare and endangered fauna include termite mounds and Boodie warrens. Termite mounds occur widely across Barrow Island including on land adjacent to the Operational Area (Ref. 1). Boodie warrens are widely and evenly distributed in low density across Barrow Island. Surveys indicate that the two closest Boodie warrens are approximately 100 m from the Operational Area (Ref. 1).

Vegetation adjacent to the Operational Area may also provide nesting habitat for the White-winged Fairy-wren (Barrow Island), but the species nests in a wide variety of habitats across Barrow Island (Ref. 1; Ref. 9).

Barrow Island drainage lines are considered to be Priority Ecological Communities, however this listing does not extend to drainage lines that have been previously disturbed. Vegetation also slows water flow, which decreases erosion, sediment loss, turbidity at outflows into the ocean, and increases water recharge.

### 3.4.4 Terrestrial Fauna

Mobile and transient mammals, birds and reptiles, as described in Section 3.3.4, are expected to be present on the land adjacent to the Operational Area, although the land is not expected to be of specific significance to fauna.

### **3.4.5 Cultural Heritage**

Three isolated aboriginal heritage artefacts, comprising stone flakes and fragments, are located within 100 m of the Operational Area (Ref. 17; Ref. 18; Ref. 19; Ref. 20).

### **3.4.6 Petroleum Activities and Infrastructure**

As described in Section 3.3.6, infrastructure associated with the Gorgon Gas Development Project, and the Barrow Island oil field road network traverse land adjacent to the Operational Area.

## 4.0 Environmental Risk Assessment Methodology

An Environmental Risk Assessment Workshop was undertaken to evaluate impacts and risks arising from the petroleum activities described in Section 2.0. The risk assessment also considered emergency conditions and spill response activities.

The risk assessment was undertaken in accordance with the CAPL Health, Environment, and Safety (HES) Risk Management Process (Ref. 21) and the processes outlined in ISO 31000:2009 Risk Management – Principles and Guidelines and Handbook 203:2012 Managing Environment-related Risk (Ref. 22).

The environmental impact and risk evaluation process comprised these components:

- identification and description of the petroleum activity
- identification of particular environmental values
- identification of relevant aspects
- identification of relevant environmental hazards
- exposure evaluation
- evaluation of impacts and risk
- consequence
- control measures and as low as reasonably practicable (ALARP) evaluation
- likelihood
- quantification of the level of risk
- risk acceptance criteria
- environmental performance objectives, standards, and measurement criteria.

Table 4-1 summarises the environmental impacts, risks, and control measures in place to manage the activity.

**Table 4-1: Summary of the Potential Impacts Risks and Control Measures**

Source of Environmental Impact or Risk (Hazards)	Potential Environmental Impacts and Risks (Consequences)	Control Measures
Venting of CO <sub>2</sub> and nitrogen during CSU will generate noise emissions	The generation of noise emissions has the potential to result in behavioural disturbance of fauna.	<ul style="list-style-type: none"> <li>• CO<sub>2</sub> vent valves have Allowable Sound Pressure Level of 110 db @ 1m.</li> </ul>
Operation of CO <sub>2</sub> Pipelines or Wells has the potential to result in a leak of reservoir CO <sub>2</sub>	<p>A release of CO<sub>2</sub> has the potential to result in above-ground impacts such as:</p> <ul style="list-style-type: none"> <li>• localised asphyxiation hazard to terrestrial fauna if CO<sub>2</sub> settles temporarily in low-lying areas</li> </ul> <p>A release of CO<sub>2</sub> has the potential to result in below-ground impacts such as:</p> <ul style="list-style-type: none"> <li>• localised plant stress impacts from increases in soil CO<sub>2</sub> concentrations</li> <li>• change the physical properties of subsurface formations resulting in impacts to subterranean communities</li> </ul>	<ul style="list-style-type: none"> <li>• Hydrotesting / pressure testing, conducted in accordance with industry standards, is carried out on the CO<sub>2</sub> Pipeline and Wells (completed in the construction phase)</li> <li>• Inspection, monitoring, and maintenance of the CO<sub>2</sub> pipeline ROW and drill centres, aligned with Appendix 1 of the CO<sub>2</sub> Pipeline Inspection, Maintenance and Monitoring Plan (Ref. 23), including but not limited to:               <ul style="list-style-type: none"> <li>○ scheduled monthly visual inspection of the pipeline ROW and drill centres</li> <li>○ intelligent pigging (assessment of wall thickness) within two years of start-up</li> <li>○ Cathodic Protection (CP) Potential Monitoring Survey approximately every 2 years</li> <li>○ Direct Current Voltage Gradient (DCVG) every 10 years.</li> </ul> </li> <li>• A Leak Detection System is in place during operations to detect if the system is leaking</li> <li>• Permit to Work (PTW) system includes a risk assessment that identifies risks associated with onshore excavation activities and includes an approved excavation certificate</li> <li>• Shutdown and venting of the CO<sub>2</sub> Pipeline and Wells is undertaken in accordance with CO<sub>2</sub> Pipeline Isolation Plan (Ref. 24)</li> <li>• Implement the CO<sub>2</sub> Disposal Management Plan (Ref. 25)</li> </ul>

Source of Environmental Impact or Risk (Hazards)	Potential Environmental Impacts and Risks (Consequences)	Control Measures
<p>Operation of pressure management wells has the potential to result in a leak of Dupuy Formation water</p>	<p>A release of higher-temperature brackish Dupuy Formation water has the potential to result in localised impacts to seasonal drainage line vegetation, and to underlying stygofauna</p>	<ul style="list-style-type: none"> <li>• Hydrotesting, conducted in accordance with industry standards, is carried out on the water spool lines (completed in the construction phase)</li> <li>• A monthly visual inspection will be undertaken of the Pressure Management drill centres</li> <li>• Pressure management wells will be equipped with functional flow and pressure meters to provide real-time flow and pressure data to the CCR</li> <li>• Pressure management wells will be fitted with trip shutdown valves and maintained in accordance with the CMMS</li> <li>• The pressure management system will be isolated following a detection of a leak in accordance with the CO2 Isolation Plan (Ref. 24)</li> <li>• Spills will be contained in accordance with Section 3.1 the Gorgon Operations - Procedure for use of Spill Kits Located in Gorgon Operations Areas (Ref. 28) to prevent the spill reaching the natural environment which includes measures such as:               <ul style="list-style-type: none"> <li>○ Blocking drainage channels and other exit points from the hardstand;</li> <li>○ Installing earthen (or other) bunds around the perimeter of the hardstand; or</li> <li>○ Mobilising vacuum trucks to to clean up excess water from the hardstand.</li> </ul> </li> <li>• Spills will be cleaned up in accordance with Section 3.1 the Gorgon Operations - Procedure for use of Spill Kits Located in Gorgon Operations Areas (Ref. 28) and will require:               <ul style="list-style-type: none"> <li>○ Clear definition of the clean-up task; and</li> <li>○ Execution of site clean-up response.</li> </ul> </li> </ul>
<p>Excavation within WHZs for inspection and maintenance activities has the potential to spread weeds</p>	<p>Spreading weeds has the potential to change vegetation and ecological community structure, composition, and diversity</p>	<ul style="list-style-type: none"> <li>• PTW system includes a risk assessment that identifies weed hygiene risks and associated controls for managing vegetation disturbance and excavation activities in WHZs</li> <li>• Quarantine response will be implemented following the detection of a new weed species or proliferation of an existing weed species within the Operational Area, as per the QMS (Ref. 38)</li> </ul>

Source of Environmental Impact or Risk (Hazards)	Potential Environmental Impacts and Risks (Consequences)	Control Measures
<p>Transfer, storage and usage of chemicals at the Drill Centres</p>	<p>A chemical spill has the potential for localised soil contamination and groundwater contamination, and associated impacts to flora and vegetation adjacent to the Operational Area</p>	<ul style="list-style-type: none"> <li>• Chemical containers (e.g. IBC's) will be stored within the Chemical Injection Skids at the pressure management drill centres</li> <li>• Chemical containers (e.g. IBC's) will be secured during transport to the drill centres</li> <li>• All hazardous liquids will have secondary containment comprising the larger of 110 % of the largest tank or 25% percent of the combined tank volumes</li> <li>• All bulk portable tanks used to contain pipeline cleaning fluid in the Operational Area will have spill protection</li> <li>• Spill protection will be provided under transfer line connections</li> <li>• Stationary equipment (e.g. generators, pumps) will have spill protection</li> <li>• A work instruction / Standard Operating Procedure is implemented for lifting bulk fluids from transport vehicles</li> <li>• Chemicals selected and assessed in accordance with the Chemical Selection and Use ABU Environmental Performance Standard (Ref. 68)</li> <li>• Personnel responsible for procuring hazardous materials will complete the relevant chemical training.</li> <li>• All spills will be recorded</li> <li>• Spills will be contained in accordance with Section 3.1 the Gorgon Operations - Procedure for use of Spill Kits Located in Gorgon Operations Areas (Ref. 28) to prevent the spill reaching the natural environment which will include measures such as:             <ul style="list-style-type: none"> <li>○ Contain the spread of the spill by using the materials in the spill kit to stop the spread of the spill and control its flow path;</li> <li>○ Surround the spill with spill booms or socks; or</li> <li>○ Blocking drainage channels and other exit points from the hardstand.</li> </ul> </li> <li>• Spills will be cleaned-up to ensure spilled material is recovered, contaminated materials are removed, and all waste is disposed of in a way that minimises impact to the environment in accordance with Section 3.1 the Gorgon Operations - Procedure for use of Spill Kits Located in Gorgon Operations Areas (Ref. 69), which requires:             <ul style="list-style-type: none"> <li>○ Clear definition of the clean-up task; and</li> <li>○ Execution of site clean-up response to ensure containment, recovery and disposal of contaminated materials.</li> </ul> </li> </ul>
<p>Document ID: ABU161100705 Revision ID: 1.4 Revision Date: 14 February 2018 Information Sensitivity: Public Uncontrolled when Printed</p>		<ul style="list-style-type: none"> <li>• Vehicles involved in transporting bulk chemical containers / maintenance inspections will contain a spill kit</li> </ul>

Source of Environmental Impact or Risk (Hazards)	Potential Environmental Impacts and Risks (Consequences)	Control Measures
Excavation for inspection and maintenance activities has the potential to create a trap for terrestrial fauna	Excavations left open overnight have the potential to trap terrestrial fauna, potentially resulting in injury or mortality	<ul style="list-style-type: none"> <li>• Egress controls and physical barriers will be implemented, where required, in excavations left open overnight</li> <li>• PTW system includes a risk assessment that identifies risks associated with onshore excavation activities</li> </ul>
The movement of vehicles within the Operational Area for IMR activities has the potential to create a hazard (vehicle strike) to terrestrial fauna	Fauna death from fauna strike	<ul style="list-style-type: none"> <li>• In-vehicle Monitoring System to manage vehicle speeds within the ROW</li> <li>• Driver requirements before driving on Barrow Island are met</li> <li>• Trained fauna handler</li> <li>• Any harm or mortality to EPBC Act listed species is reported to the Department of the Environment and Energy</li> </ul>

## 5.0 Management Approach

The implementation strategy in the EMP identifies the systems, practices, and procedures used to ensure the environmental impacts and risks of the activities are continuously reduced to ALARP and the environmental performance outcomes and standards are met. These are predominantly driven through CAPL's Operational Excellence Management System (OEMS).

### 5.1 Operational Excellence Management System

The implementation strategy of the EMP was developed in line with CAPL's OEMS. Chevron's Operational Excellence Management System is aligned to ISO 14001:2004; Table 5-1 lists the key components.

**Table 5-1: OEMS Elements Relevant to the Activity**

OEMS Element	Element Description	Key Processes Relevant to the Activity
Safe Operations (OE-03)	Operate and maintain facilities to prevent injuries, illness, and incidents	<ul style="list-style-type: none"> <li>(OE-03.01.01) ABU HES Risk Management (Ref. 21)</li> <li>(OE-03.09.01) Marine Safety Reliability and Efficiency – ABU Standardised OE Process (Ref. 31)</li> <li>(OE-03.06.02) Managing Safe Work – ABU Standardised OE Process (Ref. 32)</li> </ul>
Management of Change (OE-04)	Manage both permanent and temporary changes to prevent incidents	<ul style="list-style-type: none"> <li>(OE-04.00.01) Management of Change for Facilities and Operations – ABU Standardised OE Process (Ref. 33)</li> </ul>
Incident Investigation (OE-09)	Investigate and identify root causes of incidents to reduce or eliminate systemic causes to prevent future incidents	<ul style="list-style-type: none"> <li>(OE-09.00.01) Incident Investigation and Reporting – ABU Standardised OE Process (Ref. 34)</li> </ul>
Community and Stakeholder Engagement (OE-10)	Reach out to the community and engage in open dialogue to build trust	<ul style="list-style-type: none"> <li>(OE-10.00.01) Community and Stakeholder Engagement – ABU Standardised OE Process (Ref. 35)</li> </ul>
Compliance Assurance (OE-12)	Verify conformance with OE requirements in applicable company policy and government laws and regulations	<ul style="list-style-type: none"> <li>(OE-12.01.19) Compliance Assurance Audit Program ABU Standardised OE Procedure (Ref. 36)</li> <li>(OE-12.01.18) Compliance Assurance Management of Instances of Potential Noncompliance (Ref. 37)</li> </ul>

### 5.2 Environment Plan Review

Regulation 18 of the Petroleum Pipelines (Environment) Regulations and Condition 7.5 of the Pipeline Licence (PL93) require that CAPL submit a proposed revision of the accepted EMP to the Minister:

- before commencing a new activity
- before any significant modification or change, or a new stage of an existing activity
- before, or as soon as practicable after, any significant new environmental impact or risk occurs, or any significant increase in an existing environmental impact or risk which occurred or is to occur.

Additionally, Regulation 20 of Petroleum Pipelines (Environment) Regulations and Condition 7.6 of PL93 require that CAPL submit a proposed revision of the EMP five years from the date when the EMP is accepted by the Minister.

## 6.0 Acronyms and Abbreviations

Table 6-1 defines the acronyms and abbreviations used in this document.

**Table 6-1: Acronyms and Abbreviations**

Acronym/Abbreviation	Definition
°C	Degrees Celsius
ABU	Australian Business Unit
ALARP	As low as reasonably practicable
CCR	Central Control Room
CAPL	Chevron Australia Pty Ltd
CO <sub>2</sub>	Carbon dioxide
DC	Drill Centre
EMP	Environment Management Plan
EPBC Act	Commonwealth <i>Environment Protection and Biodiversity Conservation Act 1999</i>
GGTP	Gorgon Gas Treatment Plant
GJV	Gorgon Joint Venture
HES	Health, Environment, and Safety
IMR	Inspection, Maintenance, and Repair
ISO	International Organization for Standardization
km	Kilometre
m	Metre
mg/L	Milligrams per litre
mm	Millimetre
nm	Nautical mile
OE	Operational Excellence
OEMS	Operational Excellence Management System
PEC	Priority Ecological Community
PGPA	Policy, Government and Public Affairs
ppm	Parts per million
PTW	Permit to Work
Q1, Q2, etc.	Three-month quarter of a calendar year
ROW	Right-of-Way
TDS	Total Dissolved Solids
WA	Western Australia
WHZ	Weed Hygiene Zone

## 7.0 References

Ref. No.	Document	Document No.
1.	Chevron Australia. <i>Gorgon Gas Development and Jansz Feed Gas Pipeline: Terrestrial and Subterranean Environment Monitoring Program</i> . Perth, Western Australia.	GOR-COP-01696
2.	Chevron Australia. 2008. <i>Gorgon Gas Development Revised and Expanded Proposal: Public Environmental Review</i> . Perth, Western Australia.	
3.	Lewis, MM and Grierson, IT. 1990. <i>Land Units and Soils of Barrow Island</i> . Roseworthy Agricultural College, South Australia.	
4.	Gibson-Poole, CM. 2009. <i>Site Characterisation for Geological Storage of Carbon Dioxide: Examples of Potential Sites from the North West Shelf, Australia</i> . Doctoral dissertation, School of Petroleum, The University of Adelaide. Adelaide, South Australia.	
5.	Chevron Australia. 2015. <i>Gorgon Project: Liquid Waste Facility and Permanent Waste Disposal Wells Licence</i> . Perth, Western Australia.	
6.	Baker Petrolite. 2010. <i>Review of Scale, Corrosion and Production Chemical Risks: Gorgon Dupuy Depressurization Project</i> . Baker Hughes. BC-3009.	
7.	Department of Parks and Wildlife. <i>Threatened Ecological Database</i> . Available online <a href="https://www.dpaw.wa.gov.au/plants-and-animals/threatened-species-and-communities/wa-s-threatened-ecological-communities">https://www.dpaw.wa.gov.au/plants-and-animals/threatened-species-and-communities/wa-s-threatened-ecological-communities</a>	
8.	Biota Environmental Sciences. 2007. <i>Barrow Island Gorgon Gas Development: Summary of 2004–2006 Subterranean Fauna Surveys</i> . Perth, Western Australia.	
9.	Bamford, AR and Moro, D. 2011. Nest Site Selection of the White-winged Fairy-wren <i>Malurus leucopterus edouardi</i> on Barrow Island. <i>Corella</i> , 35: 3, pp. 84–86.	
10.	Trudgen, ME. 1989. <i>A Report on the Progress of the Regeneration of Vegetation on Areas Disturbed During Oil Production on Barrow Island</i> . Report prepared for the West Australian Petroleum Pty Ltd. Perth, Western Australia.	
11.	Mattiske Consulting Pty Ltd. 1997. <i>1996 Assessment of Revegetation on Seismic Lines, Barrow Island</i> . Perth, Western Australia.	
12.	Astron Environmental Services. 2010. <i>Gorgon CO<sub>2</sub> Injection Pipeline Flora &amp; Vegetation Survey – April 2010</i> . Perth, Western Australia.	
13.	Astron Environmental Services. 2014. <i>Gorgon Project: Astron Environmental Services Barrow Island Targeted Flora Species Monitoring Program 2014 Annual Report</i> . Perth, Western Australia.	
14.	Astron Environmental Services. 2012. <i>Barrow Island Targeted Flora Species Monitoring Program – Erythrina vespertilio and Acacia bivenosa x sclerosperma subsp. sclerosperma field visit</i> . Perth, Western Australia.	
15.	Department of Parks and Wildlife. 2015. <i>Priority Ecological Communities for Western Australia: Version 22</i> . Perth, Western Australia.	
16.	Astron Environmental Services. 2010. <i>Gorgon CO<sub>2</sub> Injection Pipeline Flora &amp; Vegetation Survey April 2010</i> . Perth, Western Australia.	
17.	Archae-aus Pty Ltd. 2009. <i>Preliminary Advice of Indigenous Archaeological Heritage Assessment of Proposed Extensions to the Gorgon Project Area, Barrow Island Pilbara, WA</i> . Perth, Western Australia.	
18.	Archae-aus Pty Ltd. 2010. <i>The Second Addendum to the report of an Indigenous Archaeological Heritage Assessment of Proposed Greater Gorgon Development on Barrow Island</i> . Perth, Western Australia.	

Ref. No.	Document	Document No.
19.	Archae-aus Pty Ltd. 2009. <i>An addendum to the report of an Indigenous Archaeological Heritage Assessment of the Proposed Greater Gorgon Development on Barrow Island</i> . Perth, Western Australia.	
20.	Wanati Pty Ltd. 2012. <i>Aboriginal Archaeological Assessment CO<sub>2</sub> Pressure Management Well Locations Barrow Island, Western Australia</i> . Unpublished reported prepared for Chevron Australia.	
21.	Chevron Australia. <i>Health, Environment, and Safety (HES) Risk Management Process</i> . Perth, Western Australia.	OE-03.01.01
22.	Standards Australia/Standards New Zealand. 2009. <i>ISO 31000:2009 Risk Management – Principles and Guidelines</i> . Sydney, Australia/Wellington, New Zealand.	
23.	Chevron Australia. <i>CO<sub>2</sub> Pipeline Inspection, Maintenance and Monitoring Plan</i> . Perth, Western Australia.	GOR-COP-0043
24.	Chevron Australia. <i>CO<sub>2</sub> Pipeline Isolation Plan</i> . Perth, Western Australia.	GOR-1900-PPL-PLN-CVX-00002
25.	Chevron Australia. <i>Gorgon Project Carbon Dioxide Disposal Management Plan</i> . Perth, Western Australia.	G1-NT-REPX0001721
26.	Chevron Australia. <i>Gorgon Gas Development and Jansz Feed Gas Pipeline: Weed Hygiene Common User Procedure</i> . Perth, Western Australia.	G1-PP-HES-PRC-0016
27.	Chevron Australia. <i>Chemical Selection and Use ABU Environmental Performance Standard</i> . Perth, Western Australia.	OE-07.01.104
28.	Chevron Australia. <i>Gorgon Operations – Procedure for the Use of Spill Kits Located in Gorgon Operation Areas</i> . Perth, Western Australia.	GOR-COP- 0097
29.	Chevron Australia. <i>Gorgon Gas Development and Jansz Feed Gas Pipeline: Fauna Handling Common User Procedure</i> . Perth, Western Australia.	G1-PP-HES-PRC-0009
30.	Chevron Australia. <i>Gorgon Gas Development and Jansz Feed Gas Pipeline: Traffic Management Common User Procedure</i> . Perth, Western Australia.	G1-PP-HES-PRC-0010
31.	Chevron Australia. <i>Marine Safety Reliability and Efficiency – ABU Standardised OE Process</i> . Perth, Western Australia.	OE-03.09.01
32.	Chevron Australia. <i>Managing Safe Work (MSW) – ABU Standardised OE Process</i> . Perth, Western Australia.	OE-03.06.02
33.	Chevron Australia. <i>Management of Change for Facilities and Operations – ABU Standardised OE Process</i> . Perth, Western Australia.	OE-04.00.01
34.	Chevron Australia. <i>Incident Investigation and Reporting – ABU Standardised OE Process</i> . Perth, Western Australia.	OE-09.00.01
35.	Chevron Australia. <i>Community and Stakeholder Engagement – ABU Standardised OE Process</i> . Perth, Western Australia.	OE-10.00.01
36.	Chevron Australia. <i>Compliance Assurance Audit Program ABU Standardised OE Procedure</i> . Perth, Western Australia.	OE-12.01.19
37.	Chevron Australia. <i>Compliance Assurance Management of Instances of Potential Noncompliance</i> . Perth, Western Australia.	OE-12.01.18
38.	Chevron Australia. <i>Gorgon Gas Development and Jansz Feed Gas Pipeline: Terrestrial and Marine Quarantine Management System</i> . Perth, Western Australia.	GOR-COP-01854